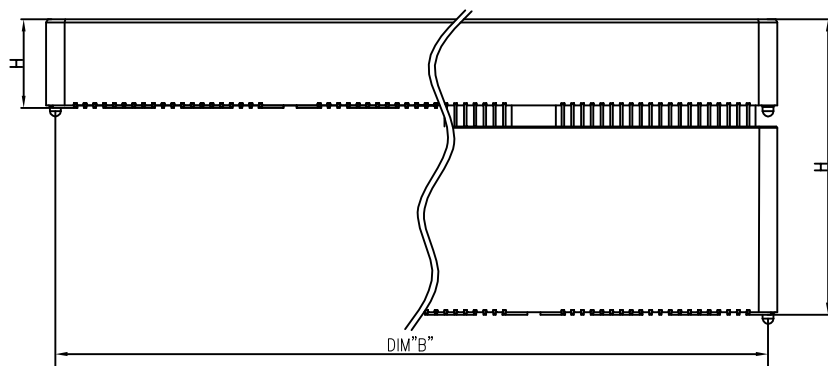
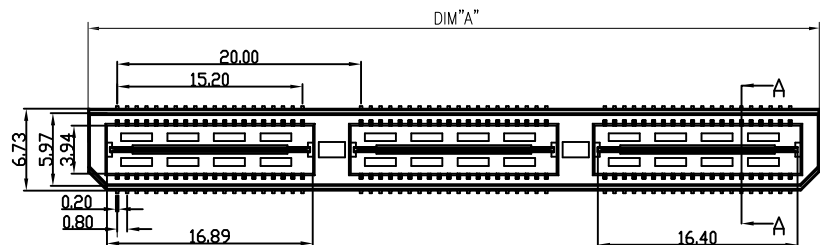


RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ± 0.05

NOTES:

1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK

2.TERMINAL/GROUND PLANE:PHOSPHOR BRONZE

PLATING:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.

3.CODING INFORMATION: LXW 3xx-xxxP-B3R-01

WATER CODE

PACKING: R: CARRIER REEL

MATERIAL: 3:LCP

COLOR: B:BLACK

P:PLUG

PIN

PLATING: G:GOLD FLASH 2:3u" GOLD IN CONTACT AREA, MATTE TIN ON

3:5u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.

4:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.

5:15u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.

6:30u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.

0.80 BTB

HIGHLY: 42-4.27H, 72-7.26H, A0-10.27H,A5-15.26H,A8-18.26H

LXWCONN BTB CONNECTOR SERIES

STYLE	H
42	4.27
72	7.26
A0	10.27
A5	15.26
A8	18.26
B1	21.26
B4	24.24
B9	29.23
A3	13.26
A4	14.24

NO. of contacts	Dimensions		
	A.	B.	C
40	20.00	18.48	0.10
80	40.00	38.48	0.10
120	60.00	58.48	0.20
160	80.00	78.48	0.20
200	100.00	98.48	0.20

LXW 连兴旺电子(深圳)有限公司
LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

制图 (DR): Kevin 2018.08.07
品名 (TITLE): 0.8mm DOUBLE ROW BTB PLUG
审核 (CHKD):
料号 (PART NO): LXW3XX-XXXP-B3R01 (QTE)
比例 (SCALE): 1:8
单位 (UNITS): mm
张数 (SHEET): 1 OF 1
图幅 (SIZE): A4

RoHS Compliant
2013/05/EC



修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

版本 (REV)	一般公差 GENERAL TOLERANCE
A	.X ± 0.25
	.XX ± 0.20
	.XXX ± 0.10
	ANGLES $\pm 1^\circ$