
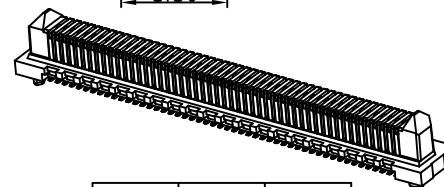



SPECIFICATIONS

- 1.CURRENT RATING: 1.0A .
- 2.VOLTAGE RATING 300VAC.
- 3.OPERATING TEMPERATURE RANGE:-55°C TO +125°C
- 4.OPERATING HUMIDITY RANGE:90% TO 95%.
- 5.WITHSTANDING VOLTAGE:500 VAC

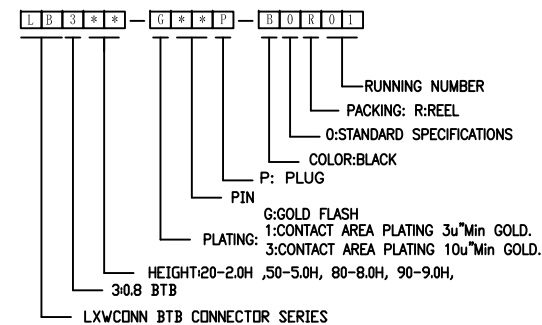


HEIGHT	H	H1
2.00	1.61	5.97
5.00	4.61	8.91
8.00	7.61	11.91
9.00	8.61	12.91

MATED HEIGHT			
ERM8 LEAD STYLE	ERF8 LEAD STYLE		
	5.0	7.0	9.0
2.0	7.00	9.00	11.00
5.0	10.00	12.00	14.00
8.0	13.00	15.00	17.00
9.0	14.00	16.00	18.00

POSITION	A	B	C	D
10	10.00	8.20	3.20	6.80
20	14.00	12.20	7.20	10.80
22	14.80	13.00	8.00	11.60
24	15.60	13.80	8.80	12.40
26	16.40	14.60	9.60	13.20
30	18.00	16.20	11.20	14.80
40	22.00	20.20	15.20	18.80
50	26.00	24.20	19.20	22.80
60	30.00	28.20	23.20	26.80
70	34.00	32.20	27.20	30.80
80	38.00	36.20	31.20	34.80
100	46.00	44.20	39.20	42.80
120	54.00	52.20	47.20	50.80
140	62.00	60.20	55.20	58.80
150	66.00	64.20	59.20	62.80
200	86.00	84.20	79.20	82.00



Recommended PC board pattern
(TOP VIEW)

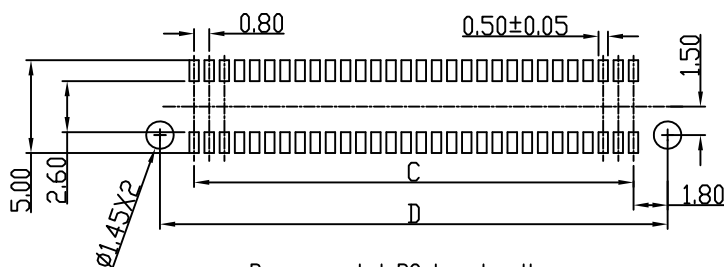

**RoHS
Compliant**
2013/95/EC

 **Pb-free**
Process
Capable

[illegible]